


B-FLEX
HEAT TRANSFER VINYL

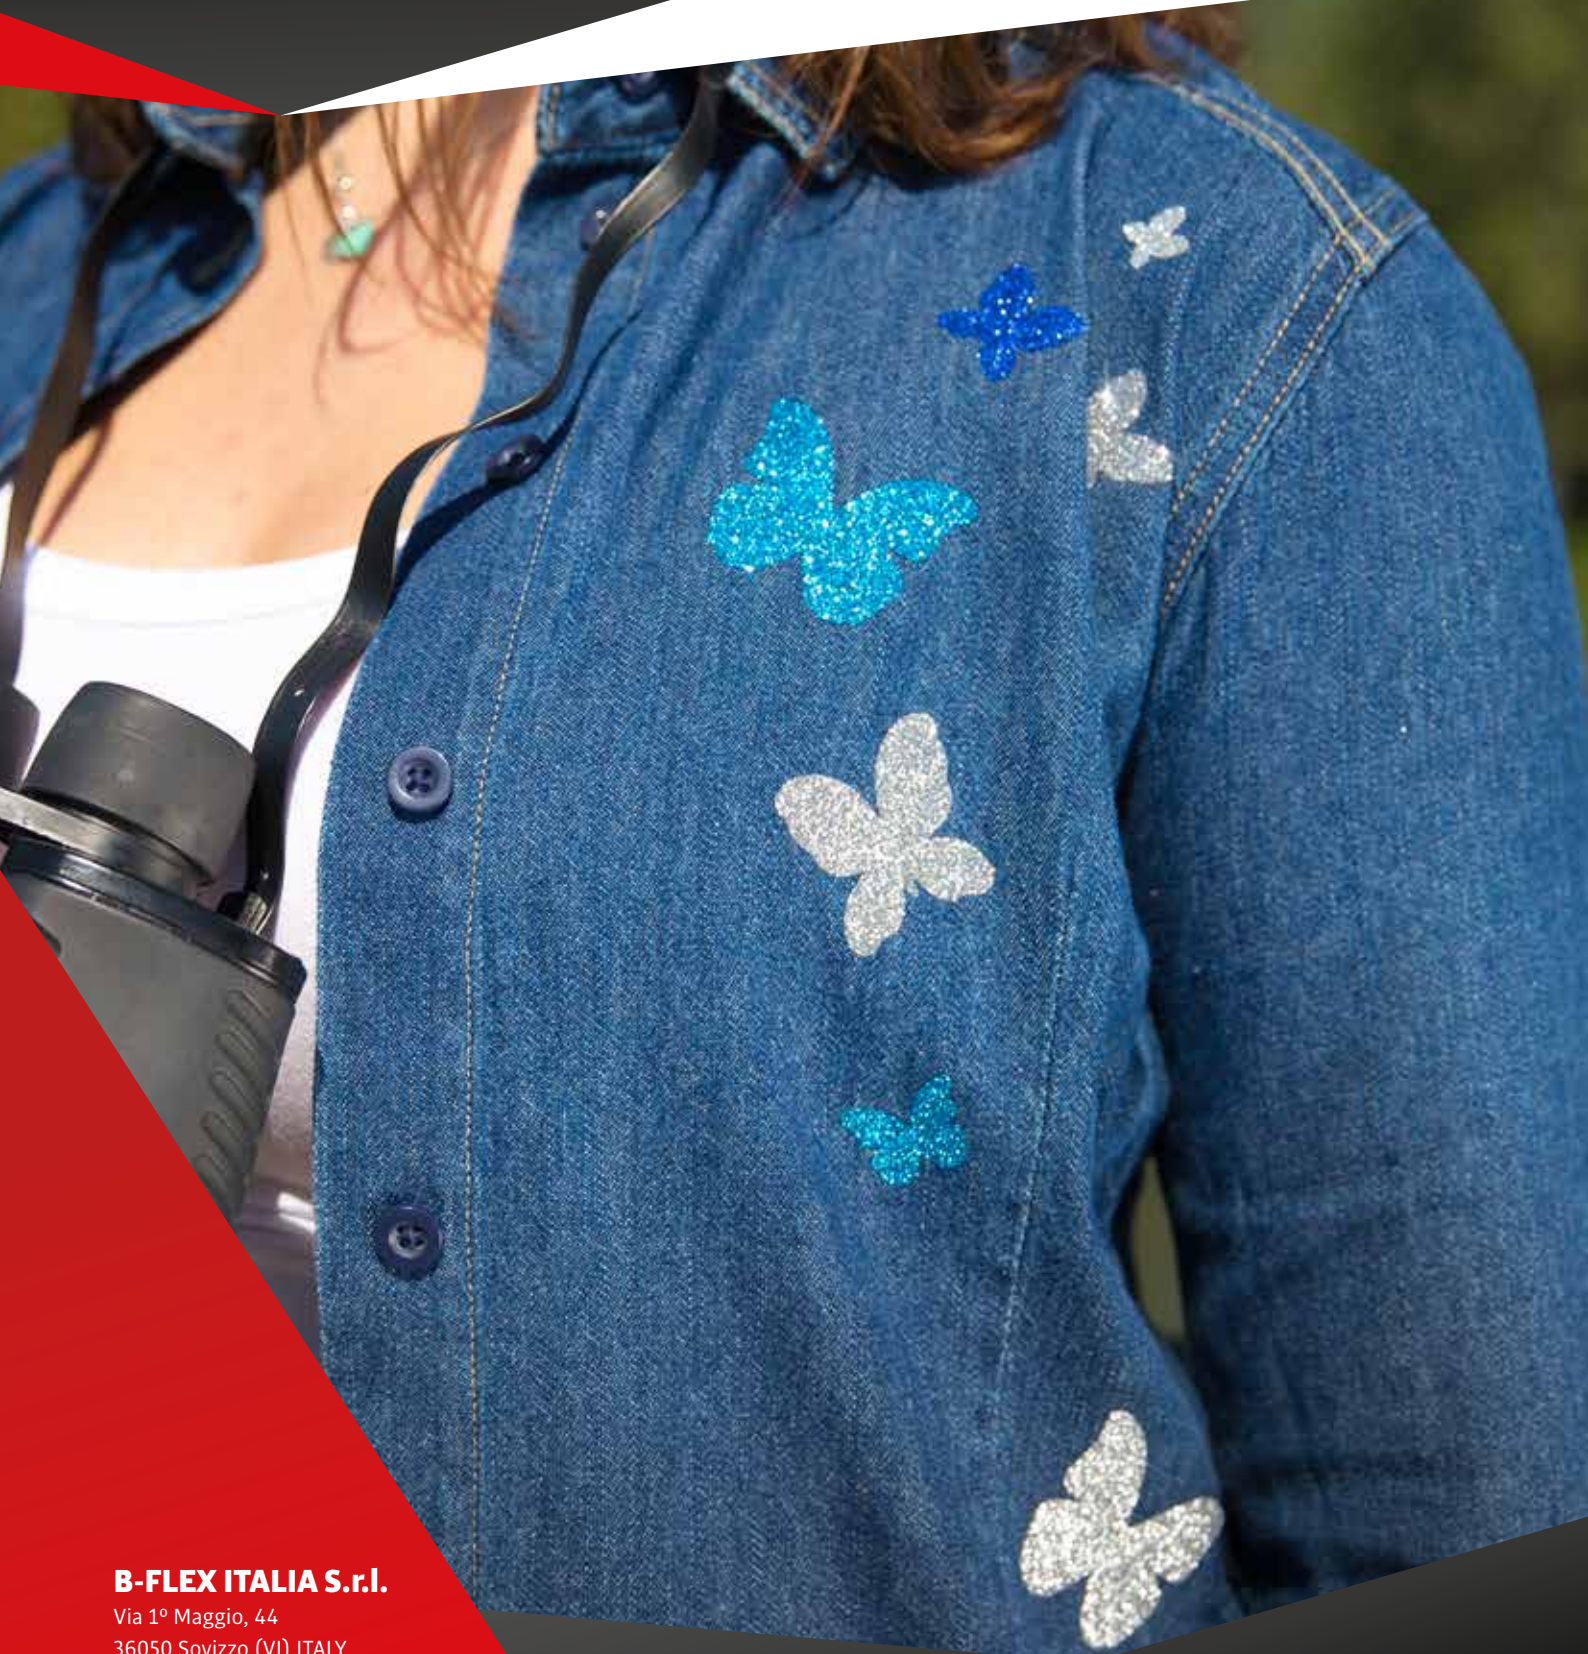

B-FLEX ITALIA S.r.l.

Via 1° Maggio, 44
36050 Sovizzo (VI) ITALY
Ph +39 0444.028139
info@b-flexitalia.com

www.b-flexitalia.com

follow us on



BF SANDY GLITTER



BF SANDY GLITTER

PRODUCT DESCRIPTION

BF SANDY GLITTER SERIES is composed by 24 films in opaque polyurethane with fine glitter applied to the film surface.

The glitter keep on the surface even after countless washes thanks to product quality.

The semi-gloss thermo-adhesive makes the cutting line highly visible and its adhesive polyester backing provides a fast and precise weeding.

BF SANDY GLITTER series presents 24 ultra-bright colors, very thin glitter and exceptional resistance to washing, so it's ideal for creating unique and luminous fashion garments.

APPLICATION INSTRUCTIONS

- Mirror cut BF SANDY GLITTER, with a 60° blade.
- Weed the BF SANDY GLITTER and remove the excess materials.
- Pre-heat your press to 150°C.
- Place the garment on the lower platen of your heat press.
- Place BF SANDY GLITTER design on the garment.
- Press at 150°C for 10 seconds.
- Peel the carrier.

STANDARD DIMENSION

- H 150 cm => available lengths:
25 mt (upon request)
- H 100 cm => available lengths:
25 mt (upon request)
- H 75 cm => available lengths:
25 mt (upon request)
- H 50 cm => available lengths:
25 mt / 12,5 mt / 5 mt / 1 mt (standard)

APPLICATIONS TIPS

- Recommended fibers: organic, synthetic, mixed.
- Not recommended for layering.
- Can be applied with other B-FLEX films (ex. FATTY, GIMME5, FLOCK, etc.).
- Ability to cut design as small as 0.3 cm.
- Doesn't require a Teflon sheet during the pressing phase.

TECHNICAL DATA

Film:	PU/ Polyurethane
Thickness:	320 μ (±5%)
Carrier:	PET film – self adhesive

APPLICATION

Temperature:	150°C - 305° F
Time:	10"
Pressure:	medium – 3,5 bar – 50 PSI

LINER REMOVAL

Hot

WASH RESISTANCE

First wash:	wait 12 hours after application
Max wash Temp.:	60°C
Dry clean:	NO
Softener:	YES
Bleach:	NO
Dryer:	YES

SAFETY NOTICE

The values reported in this document are average values as tested under normal conditions in our lab. We cannot provide a guarantee regarding the information abovementioned in this page.

Due to possible variations in the production of garments, B-FLEX recommends testing the material prior to all applications.

This spec sheet is valid for the following products:
BF SANDY GLITTER. Rev_2019/09_EN